



# BOWELL BH6 BACKHOE

For Small & Medium Tractors With CAT I. 3-Point-Hitch




- + For 18 - 35 HP tractor
- + Five optional buckets available from 230 to 900 mm width
- + Optional grabber and hydraulic 360°turnable wood grabber



# BOWELL BH6 BACKHOE

Massive back hoe, designed for medium tractors up to 35 hp with CAT I. 3-point hitch.

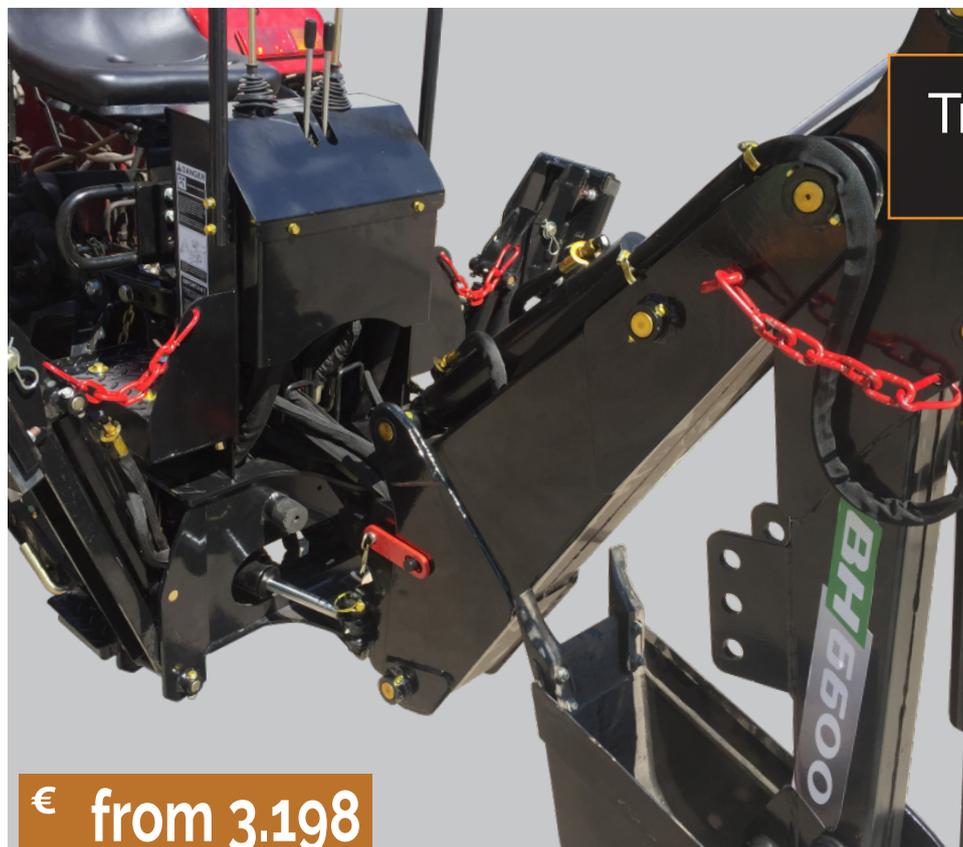

Tractor Mounted  
**BACKHOE**

**24 months**  
Warranty

12 months for commercial customers

€ from 3.198



The Bowell BH backhoes comply with all safety regulations and is CE tested following the 2006/42/EC machine directive.

Optional bucket widths from 230 to 900 mm and hydraulic 360° turnable wood grabber

**The Bowell BH-6 Backhoe is an affordable and high quality alternative to a mini excavator. The BH-6 is designed for medium to heavy duty performance and uses a very powerful hydraulic system creating a bucket digging force of 1,5to. The back hoe is easy to operate and is controlled by only two levers. The Bowell BH-6 can be mounted to all tractors with Cat I three-point hitch.**

**1** Maximum working depth 175 cm. Maximum working radius 260 cm.

**2** Exchangable and hardened bushings for arm and feet for perfect service friendliness.

**3** Hydraulic pipes with safety covers.

**4** Safety valves for all control circuits.









**5** Main hydraulics foot-safety-valve.

**6** Hydraulic system with 4 additional connectors for new features like for example hydraulic 360° turnable wood grabber.



# Technical Specifications Bowell BH6 Backhoe

DATA	BH-6
Dimensions (HxWxD) (mounted on tractor)	180 x 155 x 122 cm
Total weight	450 kg
3-point hitch	CAT I
Max. PTO shaft RPM	540 RPM
Drive system	PTO shaft pump
Hydraulic tank	17 L
Hydraulic oil	HLP32 oder HLP46
Max. pump performance	16 L/min at 2250 psi
Tractor engine power recommended	18-35 HP / 13-26 kw
Bucket dimension (LxWxD)	depending on selected bucket
Bucket volume	depending on selected bucket
Max. working depth	175 cm
Max. working radius	261 cm
Max. height	276 cm
Max. unloading height	160 cm
Max. liftable weight	400 kg
Max. bucket digging force	1500 kg
Backhoe turning angle	180°
Bucket rotation	172°
Hydraulic stabilizer width	
Up position / Down position	119 cm / 217 cm
Transport height / Transport depth / Transport	160 cm / 122 cm / 119 cm
Painting	powder coated
Metal crate (LxWxH)	220 x 90 x 110 cm

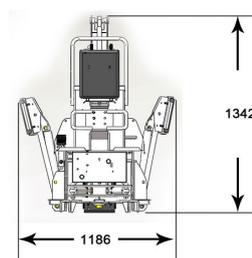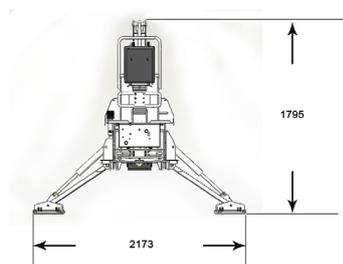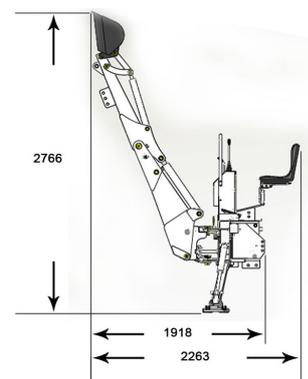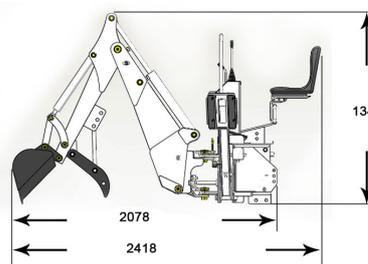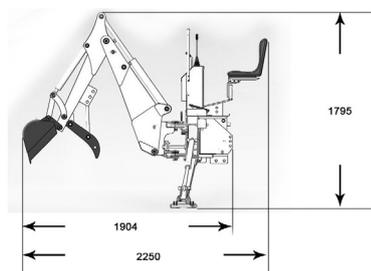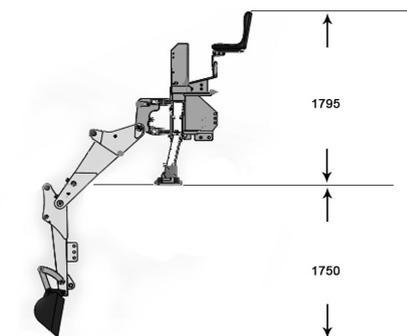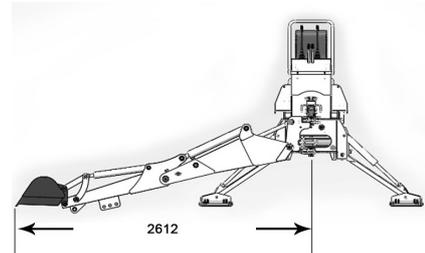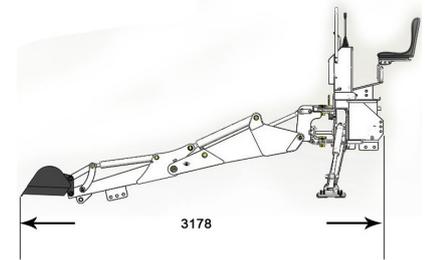



## ONLINE-SHOP FOR TRACTOR ATTACHMENTS

Flail Mower, Verge Mower, Power Sprayer, Boom Sprayer, Back Hoe and Snow Blades



### Contact

Telefon: + 49 (0) 4188 4444 773

E-mail: [info@bowell-tractor.com](mailto:info@bowell-tractor.com)

V&B Europe GmbH

Am Flidderberg 74

D-21256 Handeloh - Germany