



BOWELL EF FLAIL MOWER

For Smaller Tractors With CAT I. 3-Point Hitch



- + Up to a grass height of approx. 45 cm
- + 115 / 135 / 155 cm working width
- + For 15 - 40 PS tractor



BOWELL EF FOR SMALL TRACTORS

Flail mower with hydraulic swivel arm for maximum flexibility. Suitable for small tractors with 15 hp to 40 hp engines with CAT I. 3-point hitches.

Forged Flail
Hammers

24 months
Warranty

12 months for commercial customers



included



€ from 1.078



The Bowell EF-mowers comply with all safety regulations and is CE tested following the 2006/42/EC machine

Working widths of 115 / 135 and 155 cm


Bowell EF series flail mowers are ideal for regular maintenance of orchards, horse paddocks and fruit meadows with a grass height of less than 45cm. With available working widths from 115 cm to 155 cm EF flail mowers can be perfectly adjusted to your tractor and the job that needs to be done.

- 1 SKF rotor bearing.
- 2 Solid stainless steel grease nipples.
- 3 All outside bolts and nuts with DACROMET coating.
- 4 Reinforced pulley for 17mm belts.
- 5 Ball bearing mounted rear roller.
- 6 Exchangable counter knives for optimized shredding.



Technical Specifications Bowell EF Mower

DATEN	EF-115	EF-135	EF-155
Dimension (LxWxH)	142 x 84 x 59 cm	162 x 84 x 59 cm	182 x 84 x 59 cm
Total weight	180 kg	200 kg	220 kg
Working width	1150 mm	1350 mm	1550 mm
Recommended grass height	< 40 cm		
Adjustable mowing height	20 – 60 mm		
3-point hitch tractor	Cat 1 (Cat 2 bushings optional)		
PTO shaft, clockwise	540 RPM		
PTO shaft length	800 mm		
Working efficiency	4600-9200 m ² /h	5400-10800 m ² /h	6200-12400 m ² /h
Drive belts / width	2 / 17 mm	2 / 17 mm	3 / 17 mm
Tractor engine power (recommended)	15-25 HP	18-30 HP	25-40 HP
Rotor shaft diameter / wall thickness	76 mm / 8 mm		
Rear roller diameter / wall thickness	102 mm / 5 mm		
Material strength housing	4 mm		
Material strength side wall	6 mm		
Painting	powder coating		
Flail form	hammer		
Number of flails (separately exchangeable)	20	24	28
Weight per flail	400 g		
RPM of flail shaft	2000		
Wooden transport box (LxWxH)	135 x 80 x 55 cm	155 x 80 x 55 cm	175 x 80 x 55 cm

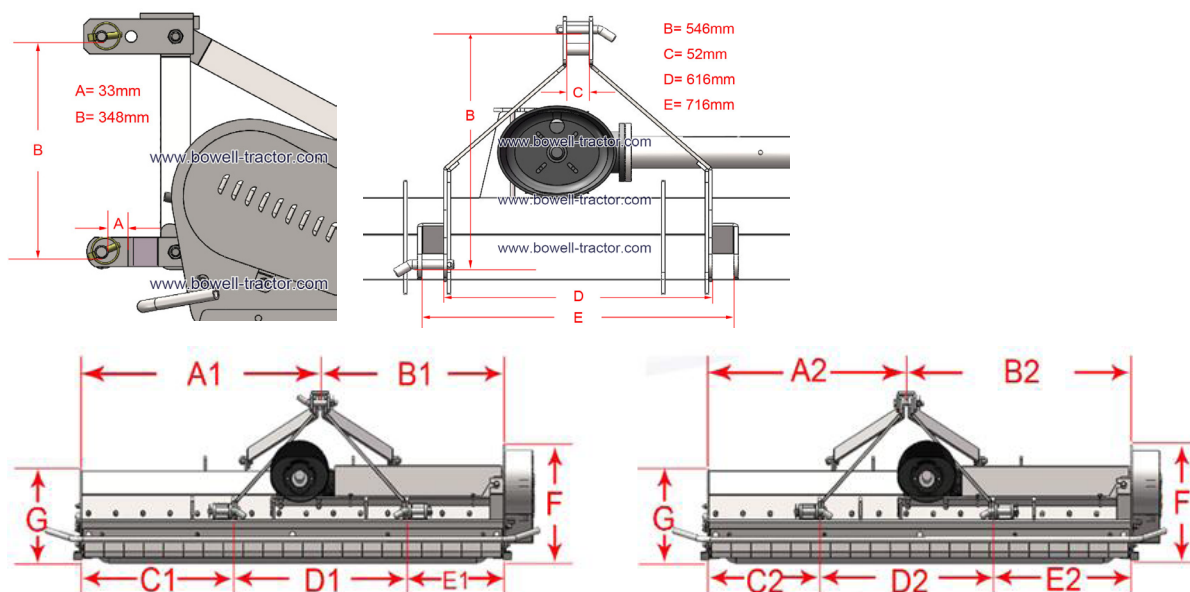

	A1 (mm)	B1 (mm)	C1 (mm)	D1 (mm)	E1 (mm)	F (mm)	G (mm)	A2 (mm)	B2 (mm)	C2 (mm)	D2 (mm)	E2 (mm)
EF115	732	430	418	628	116	408	323	582	580	268	628	266
EF135	682	680	368	628	366	408	323	532	830	218	628	516
EF155	882	680	568	628	366	408	323	732	830	418	628	516



ONLINE-SHOP FOR TRACTOR ATTACHMENTS

Flail Mower, Verge Mower, Power Sprayer, Boom Sprayer, Back Hoe and Snow Blades



Contact

Telefon: + 49 (0) 4188 4444 773

E-mail: info@bowell-tractor.com

V&B Europe GmbH

Am Flidderberg 74

D-21256 Handeloh - Germany