



BOWELL MXZ REAR FLAIL MOWER

For Medium & Larger Tractors With CAT II. & III. 3-Point Hitch



- + With hydraulic side-shift
- + Up to a grass height of approx. 120 cm & 40 mm branch diameter
- + 220 / 240 / 260 cm working widths
- + For 60 - 150 HP tractor



BOWELL MFZ FLAIL MOWER

Heavy duty flail mower with 1500 g flail hammers for branches with up to 50 mm diameter with hydraulic side-shift for medium and larger tractors from 60 hp to 150 hp engines.



€ from 3.198

Hydraulic
Side-shift system

24 months

Warranty

12 months for commercial customers



included



The Bowell MFZ-flail mowers comply with all safety regulations and is CE tested following the 2006/42/EC machine

Working widths of 220 / 240 and 260 cm

The Bowell MXZ flail mower series is equipped with a heavy duty transmission by COMER Italy making it the perfect choice for for tractors up to 150hp in almost any environment. With available working widths of up to 260 cm and a 50 cm hydraulic side-shift function, Bowell professional MXZ mowers can be used most effectively where woody plants and branches like in fruit farming and vineyards have to be delt with.



- 1 SKF rotor bearing.
- 2 Solid stainless steel grease nipples.
- 3 All outside bolts and nuts with DACROMET coating.
- 4 50 cm hydraulic side shift system.
- 5 Rear gate of the mower housing can be opened for easy maintenance or mowing very high grass.
- 6 Bowell Power Efficiency Technology for 540 or 1000 RPM PTO shaft speed.



Technical Specifications Bowell MXZ Flail Mower


DATA	MXZ-220	MXZ-240pro	MXZ-260pro
Dimensions (LxWxH) cm	243 x 100 x 96 cm	258 x 109 x 100 cm	278 x 109 x 100 cm
Total weight incl. PTO shaft	608 kg	780 kg	810 kg
Working width	220 cm	240 cm	260 cm
Adjustable mowing height	20 – 75 mm		
Recommended gras height	< 120 cm	< 160 cm	< 160 cm
Hydraulic side shift	500 mm		
3-point hitch tractor	Cat II	Cat II / III	Cat II / III
PTO turning clockwise	540 / 1000 U/min		
PTO shaft	T8 - 1000 mm		
Length of hydr. pipes	2450 mm / 1850 mm		
Work performance (estimated)	11000 - 22000 m ² /h	14000 - 28000 m ² /h	16000 - 31000 m ² /h
No. of belts / width	5 / 17 mm		
Pulley diameter	222 mm upper / 168 mm lower		
Recommended tractor engine power	60-90 HP	70-120 HP	80-150 HP
Material strength mower housing	4 mm	5 + 5 mm	5 + 5 mm double wall
Material strength side walls	8 mm (MXZ) 10 mm (MXZpro)		
Painting	powder coating, green/yellow		
Flail type	toothed hammer		
Qty. of flail hammer	18	20	24
Weight per flail hammer	1500 g		
RPM rotor shaft	2140 (540 rpm PTO)	2270 (1000 rpm PTO)	2270 (1000 rpm PTO)
Diameter / material strength rotor shaft	127 mm / 8 mm	168 mm / 10 mm	168 mm / 10 mm
Diameter / material strength rear roller	196 mm / 6 mm		
Wooden shipping box (LxWxH)	250 x 100 x 120 cm	265 x 115 x 120 cm	285 x 115 x 120 cm

MXZ 220

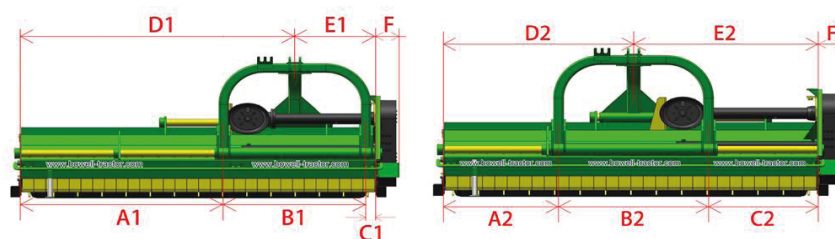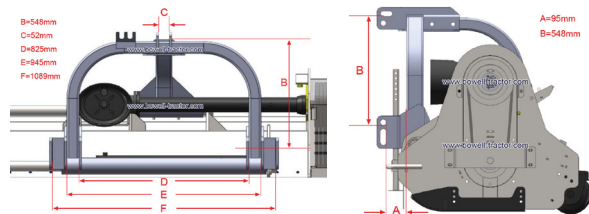

	A1 (mm)	B1 (mm)	C1 (mm)	D1 (mm)	E1 (mm)	A2 (mm)	B2 (mm)	C2 (mm)	D2 (mm)	E2 (mm)	F (mm)
MXZ220	1263	885	60	1706	502	683	885	640	1126	1086	147

MXZ 240pro/260pro

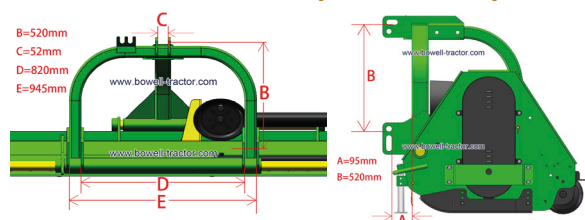

	A1 (mm)	B1 (mm)	C1 (mm)	D1 (mm)	E1 (mm)	F (mm)	G (mm)	A2 (mm)	B2 (mm)	C2 (mm)	D2 (mm)	E2 (mm)	F (mm)
MXZ-PRO-240	1703	706	1265	885	266	746	492	1123	846	685	885	1093	
MXZ-PRO-260	1903	706	1465	885	266	746	492	1323	846	885	885	1293	



ONLINE-SHOP FOR TRACTOR ATTACHMENTS

Flail Mower, Verge Mower, Power Sprayer, Boom Sprayer, Back Hoe and Snow Blades



Contact

Telefon: + 49 (0) 4188 4444 773

E-mail: info@bowell-tractor.com

V&B Europe GmbH

Am Flidderberg 74

D-21256 Handeloh - Germany